


NKL 4375C-zz

NIKOLAN S/FTP cable, 4 pairs, Cat.7A, 23 AWG, Indoor, LSZH, 500 M

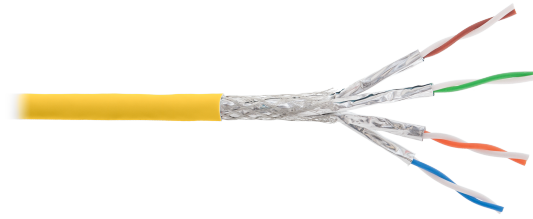

A wide range of 4th series cables will solve most of the problems associated with building networks, and while an excellent performance will guarantee a trouble-free operation for the whole life of the network. They are used to build a certified NIKOMAX SCS with a warranty period of up to 15 years. Indoor cable lineup includes shielded (S/FTP, U/FTP, F/UTP) and unshielded (U/UTP) models of categories from 5e to 7A with PVC or LSZH shells. Supplied in easy-pull-out boxes with an increased diameter insert for unwinding or on plywood drums (for heavy models).

NKL 4375C-YL Category 7A cable is shielded S/FTP, and designed for indoor cabling. The outer jacket is made of low smoke and non-combustible LSZH.

Ordering Table

P/N	Number of pairs	Category	Type	Application	Color	Length, M	Package	Dimension, mm	Volume, m3	Weight, kg
NKL 4375C-YL	4	7A	S/FTP	Indoor, LSZH	Light Green	500	Drum	370x250	0.0300	32.5
NKL 4375C-OR	4	7A	S/FTP	Indoor, LSZH	Orange	500	Drum	370x250	0.0300	32.5
NKL 4375C-WT	4	7A	S/FTP	Indoor, LSZH	White	500	Drum	370x250	0.0300	32.5

Detailed characteristics

Characteristic	Value
Category	7A
Bandwidth, MHz	1000
Type	S/FTP
Number of pairs	4
Material of conductors	Pure copper
Type of conductors	Solid
Diameter of conductors, AWG	23 AWG (0.56 ± 0.01 mm)
Insulation material	PE foam
Insulation conductor thickness, mm	0.38 ± 0.02
Diameter of conductor insulation, mm	1.35 ± 0.05
Outer jacket material	LSZH
CPR Class	Dca-s2,d2,a1
Application	For Indoor laying
Jacket thickness, mm	0.55 ± 0.05
Outer jacket diameter, mm	7.8 ± 0.3
Jacket color	Yellow / Orange / White
Screen construction (common screen)	Individual Al/PES foil, with 100% coverage under Braid made of tinned copper, with at least 30% coverage
Protective film	-
Ripcord	-
Mass density (kg) per unit length (km)	57.2 ± 0.5
Radius of bending during laying	At least 8 cable diameters
Radius of bending during operation	At least 4 cable diameters
Maximum tensile strength	No more than 100 N
Characteristic impedance, ohms	100 ± 15
Nominal velocity of propagation (NVP)	0.74 ± 0.1
Max. Conductor resistance(DC), ohms/km	≤ 93.8
Compliance	Exceeds the requirements of the standards: ISO/IEC 11801. EN 50173 & TIA/EIA-568-C.2 10BASE-T, 100BASE-TX, 100BASE-T4. 1000BASE-T, 10GBASE-T, 40GBASE-T, ATM-25. ATM-51. ATM-155. 100VG-AnyLan, TR-4. TR-16 Active, TR-16 Passive
Supported applications	ATM-51. ATM-155. 100VG-AnyLan, TR-4. TR-16 Active, TR-16 Passive
Temperature ranges	Storage from -20 to +60 ° C. Installation from 0 to +50 ° C. Operation from -20 to +60 ° C
Warranty	Component – 5 years. System – 15 years as part of a certified NIKOMAX SCS